




LED TECHNOLOGY

**450 sqm**  
Illuminated area

Leader in  
sustainability 

**BATTERY** Line

-   
Rail maintenance
-   
Road maintenance
-   
Security
-   
Special events
-   
Military applications

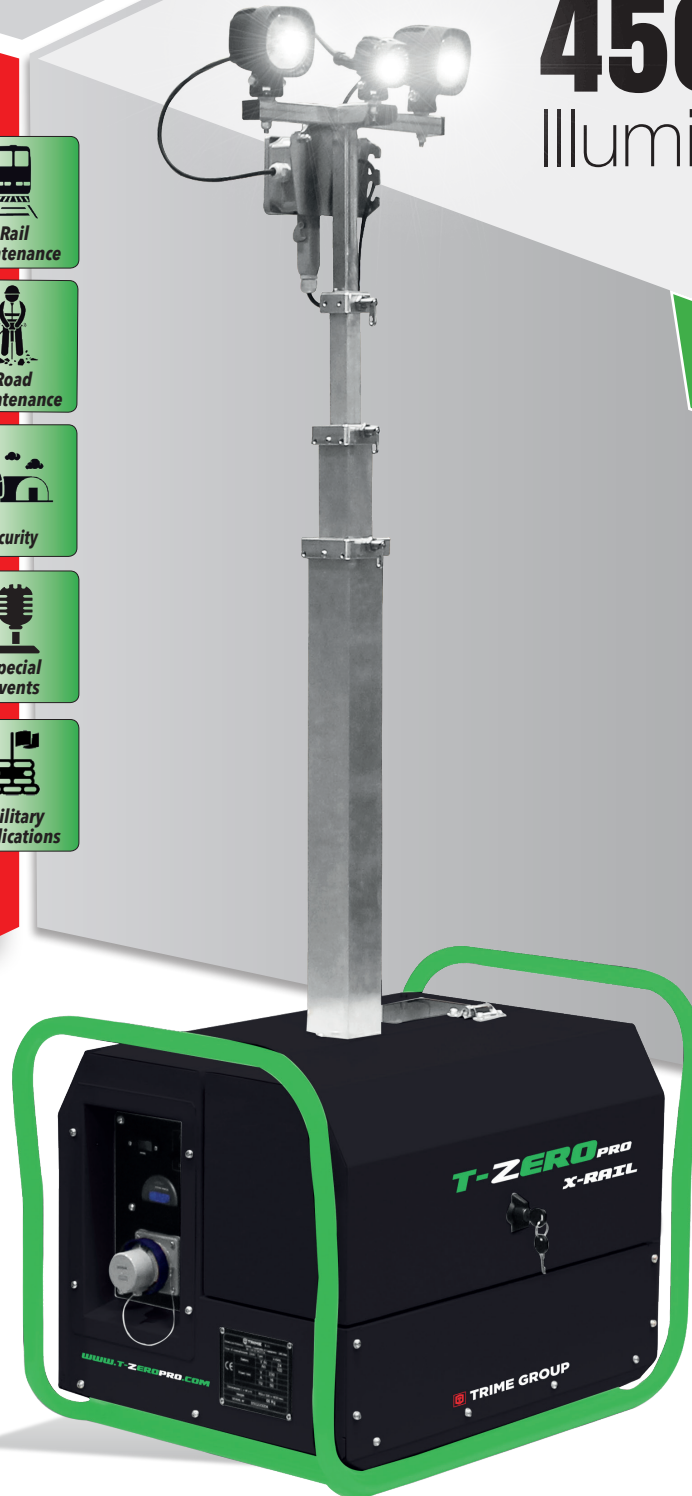

**X-RAIL**

2x29W+1x13W LED

**T-ZERO**<sub>PRO</sub>




Operation: **100% BATTERY**  
Power Battery Pack 25,9Vdc 200Ah

## X-RAIL



2x29W+1x13W LED

### T-ZERO<sup>PRO</sup>

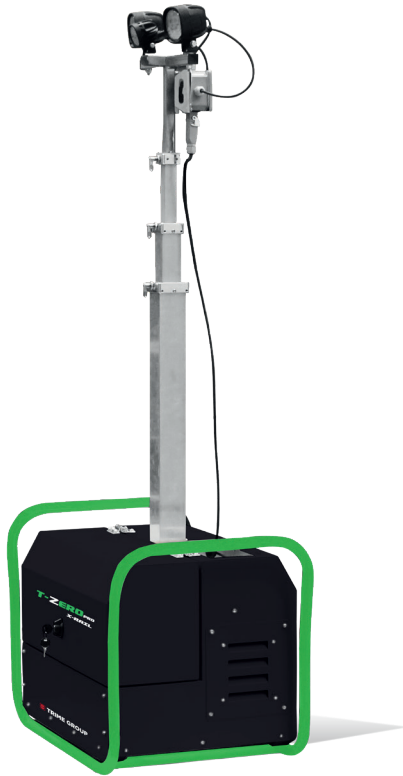

### FEATURES

- 25,9V 200Ah built-in Lithium Battery
- Battery Charger 24V 60A (230V 1Ph Built-in)
- Mains Input 230V 16A
- Battery Charger Gauge
- Floodlights Hour meter
- Removable lithium battery
- Full aluminum body
- Tubular Frame for manual handling
- Multi-directionally adjustable and tiltable floodlights
- 3 section galvanized telescopic vertical mast
- Maximum mast height 3120mm
- Manual lifting system
- 80 µm powder coating
- **Very compact dimensions for easy handling & transportability, up to 42 units per truck**
- Light weight for improved manoeuvrability
- **60hrs running time from battery**
- **3hrs recharge**



Dimensions & weight	Dimensions min (mm)	Dimensions max(mm)	Total weight (kg)	Frame (kg)	Battery weight (kg)	Must+floodlight weight (kg)		
	867x627x1824 (LxWxH)	867x627x3120 (LxWxH)	63	28	24	11		
Floodlights	Type	Power (each)	IP level	Illuminated area (sqm)				
	Led	2x29W+1x13W	65	450				
Mast	Lifting method	Max Height	Max Wind Speed					
	Manual	3120 mm	110 km/h					
Battery	Type	Battery number	Power Battery Pack	Running time	Battery charger	Charging time with floodlights off	Expected battery cycle	Expected battery life
	LITHIUM	1	25,9Vdc 200 Ah	60 h	230V 1Ph Built-in	3 h	2000	60000 h



**TRIME**<sup>®</sup> Sales Dept. +39 0382 406 252  
www.trime.it - info@trime.it  
Lighting Towers